


Electric & Manual Actuator

SG-227EA / SG-FK5112 Fire Extinguishing System

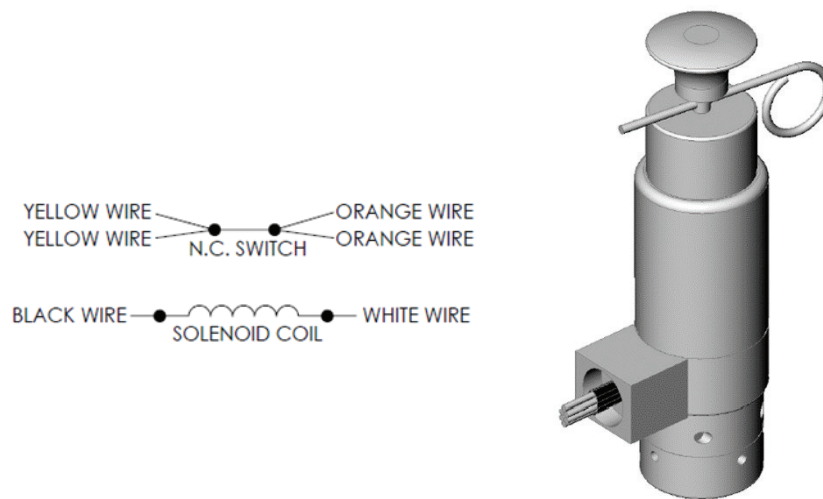

Specification

General Description	To electrically or manually activate the system
Certification No.	EX28621
Material	Brass & Stainless Steel

Material	Brass & Stainless Steel
Firing Pin Force	12 lbs (53 N)
Connection	1-1/8" x 18 UNEF
Voltage Supply	24 VDC
Current Supply	0.5 A
Monitoring Current	<30 mA
Supervisory Switch	Normally Closed (N.C.)
Temperature Range	-10 °C – 60 °C
Pin Stick-out Length	Latched Position: 5.00 ± 0.51 mm De-Latched Position: 11.35 ± 0.38 mm

HOCHIKI ASIA PACIFIC PTE. LTD.

82 UBI Ave 4 #06-02

Edward Boustead Centre, Singapore 408832 TEL: 65-6841-9728 |

FAX: 65-6841-9781 URL : www.hochikiasiapacific.com

10/2021



Specifications subject to change without notice.

Continued on back.